



FEATURES

- Stylish and efficient contemporary lighting fixture for post top mounting
- Lightweight cast aluminum fixture base with stainless steel set screws for installation
- Slip fits over common 3" OD tenons on most decorative poles
- Durable Powder Coat Finish
- 0-10v Dimming Capability
- ETL Listed

LED LIGHT SOURCE OPTIONS

- 3 Power Levels
 - 3 Color Temperatures
 - 4 Light Distributions
- (HID Version Available-Consult Factory)

MATERIALS

- Base - Cast Aluminum (A356)
- Supports - Extruded Aluminum (6061)
- Shades - Spun Aluminum
- Hardware - Stainless Steel
- Lens - Acrylic

LENS

- CA - Clear Acrylic

ACCESSORIES

- PCLL - PCL for LED Fixtures
- 22HSS - 180° House Side Shield
- SP1 - 10kV/10kA Surge Protection

LED LIGHT SOURCE CONFIGURATIONS

G3LED40—1 Driver, 1 LED Module, 1 Optic

G3LED65—1 Driver, 1 LED Module, 1 Optic

G3LED80—1 Driver, 1 LED Module, 1 Optic

DRIVER


0-10v Dimming Compatible
120 to 277 Auto Sensing
Class 2, Class P
Minimum Rating IP66

LED MODULE

16 High efficacy multi-die packages
(4) 2x2 LED Configuration
70CRI—2700, 3000, 4000 CCT

LED OPTICS

(4) 2x2 Multi Lens
PMMA (Acrylic)
IES Type II, III, IV, V

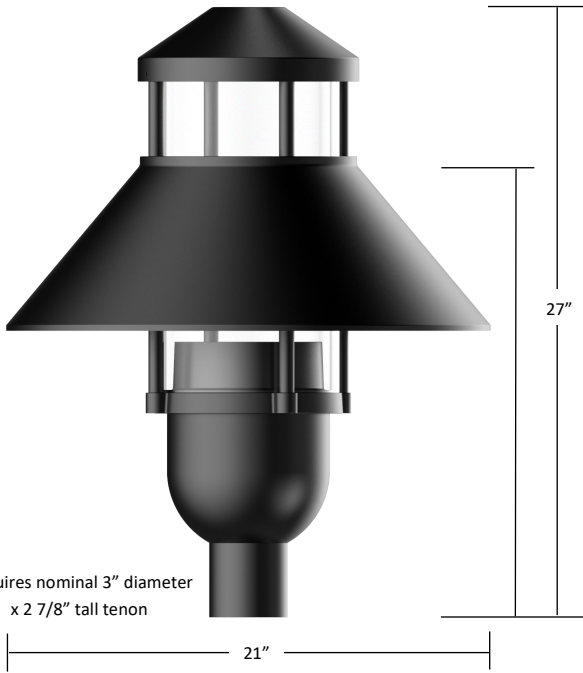

Finish

The fixture will be finished with an electrostatically applied polyester powder coat suitable for exterior use. The fixtures are pretreated using industry standard environmentally responsible processes for a long lasting and durable finish.

Standard Finishes

- BK** - Black (Gloss)
- BT** - Black (Textured)
- SB** - Statuary Bronze
- GN** - Green

Premium Finishes

- WH** - White (Gloss)
- CV** - Copper Vein
- GV** - Green Vein
- CF** - Custom Finishes

LED Light Source Performance Data In Acrylic Clear Lens

GC5142			2700K (27K)	3000K (30K)	4000K (40K)
MODULE NAME	NOM WATT	DISTRIBUTION TYPE	DELIVERED EFFICACY LUMENS (LPW)	DELIVERED EFFICACY LUMENS (LPW)	DELIVERED EFFICACY LUMENS (LPW)
G3LED40	41.2	T2			
		T3			
		T4			
		T5			
G3LED65	67.9	T2			
		T3			
		T4			
		T5			
3LED80	82.1	T2			
		T3			
		T4			
		T5			

LED Light Source Options

Light Source	Nominal Power	Distribution	CCT
G3LED40	41.2 W	Type II (T2)	2700K (27K)
G3LED65	67.9 W	Type III (T3) Type IV (T4)	3000K (30K)
G3LED80	82.1 W	Type V (T5)	4000K (40K)

LED Drivers are auto voltage sensing, standard 120V through 277V (347, 480V Version Available-Consult Factory)

Ordering Guide

Luminaire	Lens Material/ Color	LED Light Source	Distribution Type	CCT	Optional Photocell	Optional House Side Shield	Surge Protection	Finish
EXAMPLE GC5142	— CA	G3LED65	T3	40K	PCLL	22HSS	SP1	BT
GC5142	CA	G3LED40	T2	27K	PCLL	22HSS	SP1	BK
		G3LED65	T3	30K				BT
		G3LED80	T4	40K				SB
			T5					GN
								Premium Finishes WH, CV, GV, CF
								Choose Finish