

FEATURES

- Stylish and efficient pendant mounted contemporary lighting fixture
- Lightweight cast aluminum fixture housing with stainless steel set screws for installation
- 1 1/4" Threaded Pipe mounting for secure attachment
- Durable Powder Coat Finish
- 0-10v Dimming Capability
- ETL Listed

LED LIGHT SOURCE OPTIONS

- 3 Power Levels
 - 3 Color Temperatures
 - 4 Light Distributions
- (HID Version Available-Consult Factory)

MATERIALS

- Housing - Cast Aluminum (A356)
- Shade - Spun Aluminum
- Louvers (GC6020L only) - Cast Aluminum
- Louver Lens (GC6020L only) - Acrylic
- Hardware - Stainless Steel
- Lens (Optional) - Tempered Glass


LENS OPTION

- TG - Tempered Glass
- NL - No Lens

ACCESSORIES

- PCLL - PCL for LED Fixtures
- 26HSS - 180° House Side Shield
- SP1 - 10kV/10kA Surge Protection

GC6000 Series for use with brackets shown

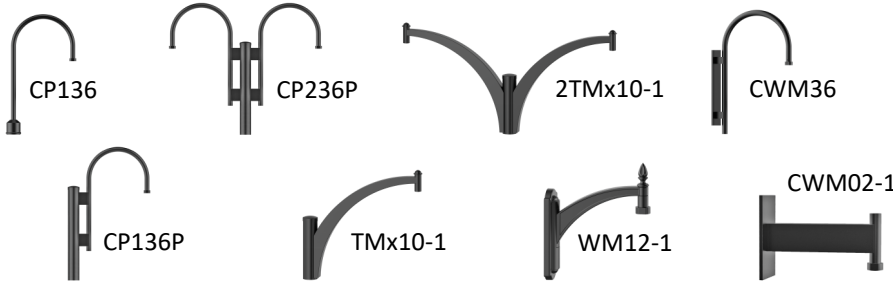

LED LIGHT SOURCE CONFIGURATIONS

- G2LED40**—1 Driver, 1 LED Module, 1 Optic
- G2LED65**—1 Driver, 1 LED Module, 1 Optic
- G2LED80**—1 Driver, 2 LED Modules, 2 Optics

DRIVER



0-10v Dimming Compatible
 120 to 277 Auto Sensing
 Class 2, Class P
 Minimum Rating IP66

LED MODULE

12 High efficacy multi-die packages
 2x6 LED Configuration
 80CRI—2700, 3000, 4000 CCT

LED OPTICS

2x6 Multi Lens
 PMMA (Acrylic)
 IES Type II, III, IV, V
 Silicone Gasket
 IP66 System

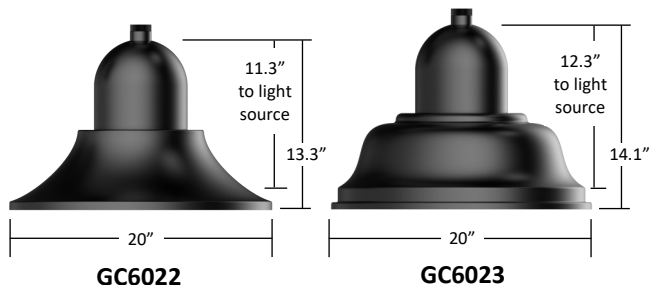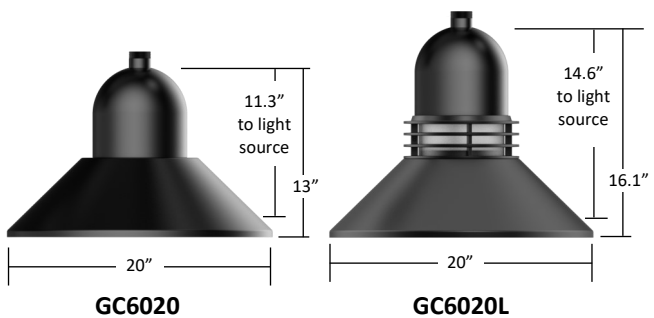

Finish

The fixture will be finished with an electrostatically applied polyester powder coat suitable for exterior use. The fixtures are pretreated using industry standard environmentally responsible processes for a long lasting and durable finish.

Standard Finishes

- BK** - Black (Gloss)
- BT** - Black (Textured)
- SB** - Statuary Bronze
- GN** - Green

Premium Finishes

- WH** - White (Gloss)
- CV** - Copper Vein
- GV** - Green Vein
- CF** - Custom Finishes

LED Light Source Options

Light Source	Nominal Power	Distribution	CCT
G2LED40	41.2 W	Type II (T2) Type III (T3)	2700K (27K)
G2LED65	67.9 W	Type IV (T4)	3000K (30K)
G2LED80	82.1 W	Type V (T5)	4000K (40K)

LED Drivers are auto voltage sensing, standard 120V through 277V (347, 480V Version Available-Consult Factory)

**LED Light Source Performance Data
In GC6020-TG Fixture**

GC6000-TG SERIES			2700K (27K)		3000K (30K)		4000K (40K)	
MODULE NAME	NOM WATT	LIGHT DISTRIBUTION	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)	DELIVERED LUMENS	EFFICACY (LPW)
G2LED40	41.2	T2	4312	104.7	4626	112.3	4822	117.0
		T3	4321	104.9	4635	112.5	4831	117.3
		T4	4225	102.5	4532	110.0	4724	114.7
		T5	4297	104.3	4610	111.9	4805	116.6
G2LED65	67.9	T2	6194	91.2	6644	97.9	6926	102.0
		T3	6206	91.4	6658	98.1	6940	102.2
		T4	6068	89.4	6510	95.9	6785	99.9
		T5	6172	90.9	6621	97.5	6902	101.6
G2LED80	82.1	T2	8572	104.4	9195	112.0	9585	116.7
		T3	8589	104.6	9214	112.2	9604	117.0
		T4	8398	102.3	9009	109.7	9390	114.4
		T5	8542	104.0	9164	111.6	9552	116.3

Ordering Guide

	Luminaire	Lens Material	LED Light Source	Distribution Type	CCT	Optional Photocell	Optional House Side Shield	Finish
EXAMPLE	GC6022	NL	G2LED80	T3	40K	PCLL	26HSS	BT
	GC6020	NL	G2LED40	T2	27K	PCLL	26HSS	BK
	GC6020L	TG	G2LED65	T3	30K			BT
	GC6022		G2LED80	T4	40K			SB
	GC6023			T5				GN
								Premium Finishes WH, CV, GV, CF
						Required	Optional	Choose Finish