




Shaft Styles

4" OD Fluted  
.125 Wall



4"OD Smooth  
.125 Wall

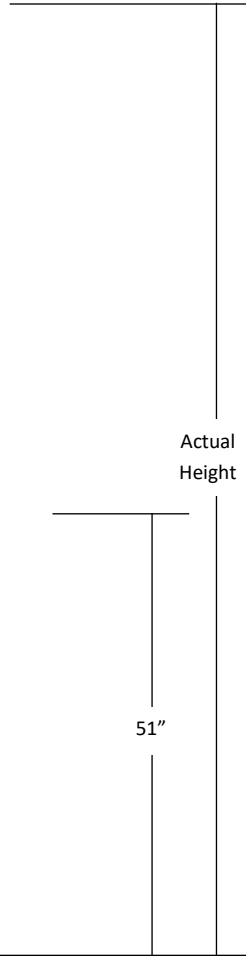

**FEATURES**

- Strong, lightweight and easy to install
- Extruded aluminum shaft welded to a decorative cast aluminum base
- 3" OD x 3" tall tenon included for luminaire mounting
- Access door for wiring secured with stainless steel screws
- Ground lug included inside base
- Durable powder coat finish
- 1/2" x 18" Anchor Bolts & Template included

**MATERIALS**

- Base - Cast Aluminum (A356)
- Shaft - Extruded Aluminum (6061-T6)
- Tenon - Cast Aluminum (A356)
- Anchor Bolts - Hot Dipped Galvanized
- Hardware—Stainless Steel

**ACCESSORIES**

- **GFCI Box** with weatherproof WIUC (Additional accessories below ordered separately) (See Accessories Page for ordering guide)
- Clamp on banner arms
- Direct bury extension
- Clamp on flag pole holder


**ANCHORAGE**

- 1/2" x 18" x 3" Hot-dipped galvanized steel L-type anchor bolts.
- (4) Bolts with (2) nuts, (2) washers per bolt included

GP313-L228-xx	GP314-L228-xx	Actual Height
GP313-L228-08	GP314-L228-08	8' 4"
GP313-L228-10	GP314-L228-10	10' 4"
GP313-L228-12	GP314-L228-12	12' 4"
GP313-L228-14	GP314-L228-14	14' 4"
GP313-L228-16	GP314-L228-16	16' 4"



Pole Details

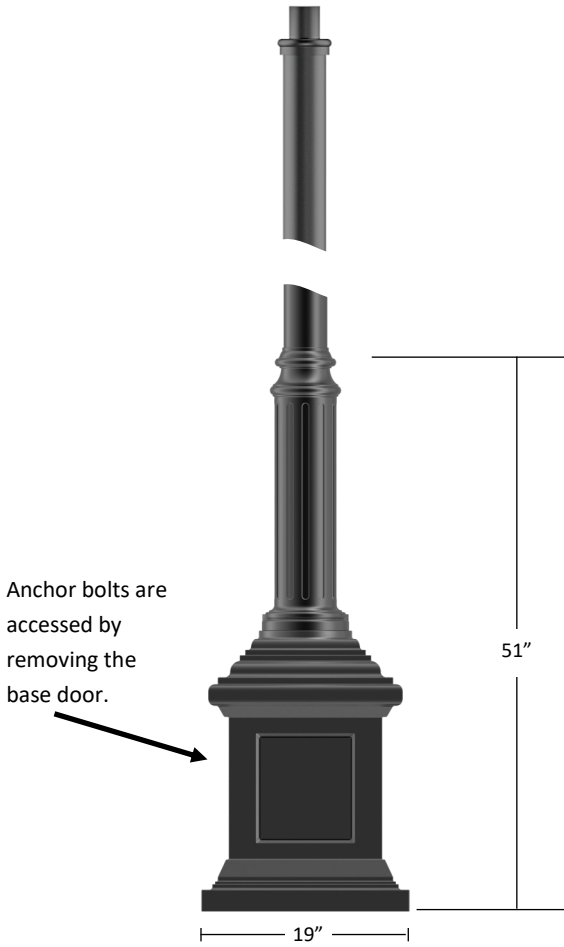

**Finish**

The pole will be finished with an electrostatically applied polyester powder coat suitable for exterior use. The pole is pretreated using industry standard environmentally responsible processes for a long lasting and durable finish.

Standard Finishes

- BK** - Black (Gloss)
- BT** - Black (Textured)
- SB** - Statuary Bronze
- GN** - Green

Premium Finishes

- WH** - White (Gloss)
- CV** - Copper Vein
- GV** - Green Vein
- CF** - Custom Finishes

**Tenons**

3" OD x 3" Tall Tenon Standard

LT - Less Tenon

*Other tenons available upon request*

*Check fixture and/or arm spec sheet for tenon requirements*


**Accessories**

**GFCI** - Provision for Ground Fault Circuit Interrupter outlet with NEC required wet location while in use type cover (WIUC). The cover is made of die cast aluminum and will be painted to match.


**GFCI Orientation** is stated as degrees from access door and **GFCI Placement** on shaft must be specified in ordering guide below.

**TOP** - placement will be 6" from top of pole.

**BOT** - placement will be 6" above the base.



**Anchor Bolt Details**




- (4) 1/2" Galvanized Steel L-Type Anchor Bolts
- (8) 1/2" Galvanized Steel Hex Nuts
- (8) 1/2" Galvanized Steel Flat Washers
- (8) 3/4" Galvanized Steel Flat Washers

(Additional accessories below ordered separately)  
(See Accessories Page for ordering guide)


Flag Pole Holder



Direct Bury Extension



Single and Double Sided Field Rotatable Banner Arm



**Ordering Guide**

	Pole/Shaft Style	Height	Tenon	Accessory	GFCI Orientation	GFCI Placement	Finish
EXAMPLE	GP313-L228	14	/ Leave blank if standard /	GFCI	— BOT	— 180	BT
	GP313-L228	08	LT	GFCI	TOP	0	BK
	GP314-L228	10			BOT	90	BT
		12				180	SB
		14				270	GN
		16					Premium Finishes
							WH, CV, GV, CF
	Required			Optional			Choose Finish